




Designed for mid-sized landscapes, the PM is engineered without compromise in the spirit of a large contemporary commercial bollard. Precisely milled from 6061 T-6 alloy, this model looks and performs like no other. Computer-designed parabolic reflector, diffuser cone and optics work together to produce long projection beam spread with no glare.

PM: Path Light

NUMBER OF LEDs:	1	3	6	9
HALOGEN LUMEN OUTPUT EQUIVALENT:	10 Watt	20 Watt	35 Watt	50 Watt
USEFUL LED LIFE (L70):	50,000 hrs avg	50,000 hrs avg	50,000 hrs avg	50,000 hrs avg
INPUT VOLTAGE:	10 to 15V	10 to 15V	10 to 15V	10 to 15V
VA TOTAL: (Use to size the lighting controller)	2.4	4.5	13.5	13.5
WATTS USED:	2.0	4.2	10.1	11.2
LUMENS PER WATT (EFFICACY)	20	26	23	22
MAX LUMENS:	41	106	186	219
CRI (Ra)	81	78	78	79

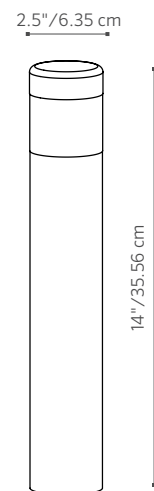



PM: Path Light

FACTORY INSTALLED OPTIONS: Order 1 + 2 (optional) + 3 + 4

Step	Description	Code
1	FIXTURE	PM
2	OPTIONAL ZD	ZD (Refer to the Luxor page in the Lighting Control section)
3	LAMP	1LED, 3LED, 6LED & 9LED (50,000 avg. life hours)
4	FINISH	WG, FW, AL, BZ, DG, WI, VF, SB, FB, SV


EXAMPLE: PM-ZD-6LED-DG = PM - ZD Option - 6 LED Board - Desert Granite Finish

FIELD INSTALLED OPTIONS: Order Individually

Mounting Options		
Long Slot Spike (250015840000) 2.5" x 10" Included ▶	<p>Long Slot Spike</p>	<p>PDM XX**</p>
PDM (PostModerne Deck Mount, 3" x 1.19")		

EXAMPLE: PDM-BZ = PM Deck Mount - Bronze Metallic Finish

PHOTOMETRICS:

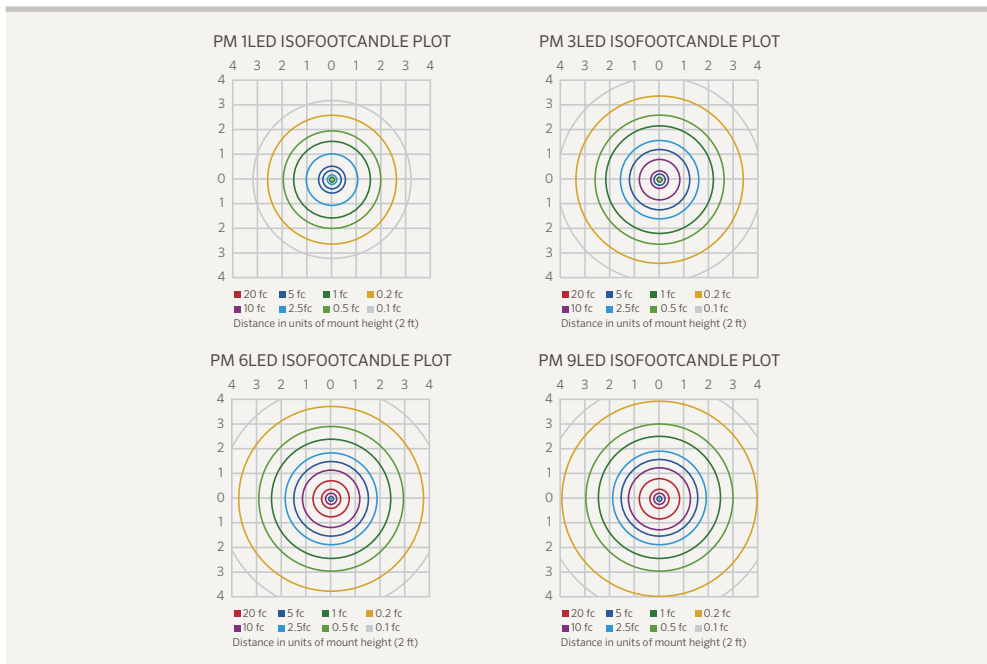

The PM includes your choice of LED board, finish, 5 ft. lead wire and a Long Slot Spike.

POWDER COAT

	WG = White Gloss
	FW = Flat White
	AL = Almond
	BZ = Bronze Metallic
	DG = Desert Granite
	WI = Weathered Iron
	VF = Verde Speckle
	SB = Sedona Brown
	FB = Flat Black
	SV = Silver

The PM includes choice of LED lamp and powder coat finish

All PM path lights come standard with amber, green, blue and frosted filters

** Denotes finish code

