

Path and Area Lights

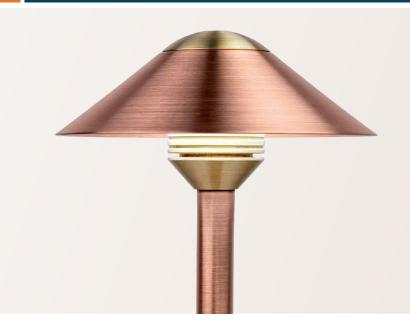

The LED CA emits efficient light for a variety of applications. Its soft, organic lines complement natural landscape elements.

CA: Path Light

NUMBER OF LEDS:	1	3	ZDC
HALOGEN LUMEN EQUIVALENT:	10 Watt	20 Watt	10 Watt
USEFUL LED LIFE (L70):	50,000 hrs avg	50,000 hrs avg	50,000 hrs avg
INPUT VOLTAGE:	10 to 15V	10 to 15V	11 to 15V
VA TOTAL*:	2.4	4.5	7.2
WATTS USED:	2.0	4.2	6.0
LUMENS PER WATT (EFFICACY):	19	25	26
TOTAL LUMENS:	39	103	83
CRI (Ra):	86	67	84
CCT:			
AMBER FILTER	2700K	2700K	N/A
FROSTED FILTER	3900K	3900K	N/A
GREEN FILTER	4500K	4500K	N/A
BLUE FILTER	5200K	5200K	N/A



^{*(}Use this number to size the transformer)



CA: Path Light

FACTORY INSTALLED OPTIONS (TOP + RISER ASSEMBLY): Order 1 + 2 + 3 + 4 (Optional) + 5 + 6 + 7

Step	Description	Code
1	TOP ASSEMBLY	CALEDTA
2	TOP FINISH	AB*, AT*, CU, NP*, WG, FW, AL, BZ, DG, WI, SB, FB
3	RISER TYPE	G
4	LUXOR OPTION	ZD, ZDC [†] (Color)
5	LAMP	1LED, 3LED,†
6	RISER HEIGHT	8RA, 12RA, 18RA, 24RA, 36RA (in inches)
7	FINISH	AT*, AB*, CU, NP*, WG, FW, AL, BZ, DG, WI, SB, FB


EXAMPLE: Top Assembly-Top Finish + Riser Type-Luxor Option-Lamp-Riser Height-Riser Finish CALEDTA-FB + G-ZD-1LED-18RA-FB

FIELD INSTALLED OPTIONS: Order Individually

Mounting Options			
Long Slot Spike (250015840000) 2.5" x 10" Included		n	
SuperJ-Box (<i>SJ-XX**</i>) 2.5" x 12"	22 KZ	V	
Post Mount (<i>PM-XX**</i>) 2.5" x 13"	₩	#	
Versa Box (VB-050-XX**) 2.2" x 1.5"			
3-Prong Spike (250020020000) 5.1" Diam. x 9.0" tall	Long Slot Spike	Super J-Box XX**	Post Mount XX**

EXAMPLE: 753900 = Super Slot Spike

PHOTOMETRICS:

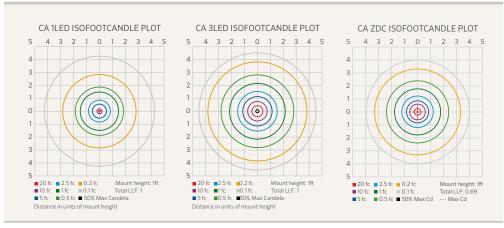

Beam angle is calculated using LM-79 method for SSL Luminaires:

METALS



AT = Antique Tumbled* (On Brass/Copper)



AB = Antique Bronze* (On Brass/Copper)



 $\mathbf{CU} = \mathsf{Copper}$



NP = Nickel Plate*

POWDER COAT



WG = White Gloss



FW = Flat White



AL = Almond



BZ = Bronze Metallic





DG = Desert Granite



WI = Weathered Iron





SB = Sedona Brown



FB = Flat Black

The CA and G-riser includeschoice of LED board, riser size, finish, 3 ft. lead wire and Long Slot Spike.



All CA path lights come standard with amber, green, blue and frosted filters

Note: Only the copper portions of the path lights are powder coated. The brass pieces remain natural, except on Antiqued and Nickelplated finishes.

- * May require longer lead time
- ** Denotes finish code

 $^{\ ^\}dagger \ \text{Fixtures specified with ZDC Technology}^{\tiny \intercal} \ \text{are available only in one circuit board configuration}.$ Do not specify a number of LEDs when ordering.

[&]quot;Beam angle is defined as two times the vertical angle at which the intensity is 50% of the maximum."