




*The CV offers soft and efficient path lighting that can be used to increase safety for walkways of all shapes, sizes, and locations. Its rounded hat shape gives it a classic look that blends well in a variety of landscapes.*

### CV: Path Light

NUMBER OF LEDs:	1	3	ZDC
HALOGEN LUMEN EQUIVALENT:	10 Watt	20 Watt	10 Watt
USEFUL LED LIFE (L70):	50,000 hrs avg	50,000 hrs avg	50,000 hrs avg
INPUT VOLTAGE:	10 to 15V	10 to 15V	11 to 15V
VA TOTAL*:	2.4	4.5	7.2
WATTS USED:	2.0	4.2	6.0
LUMENS PER WATT (EFFICACY):	19	25	26
TOTAL LUMENS:	39	103	83
CRI (Ra):	86	67	84
CCT:			
AMBER FILTER	2700K	2700K	N/A
FROSTED FILTER	3900K	3900K	N/A
GREEN FILTER	4500K	4500K	N/A
BLUE FILTER	5200K	5200K	N/A

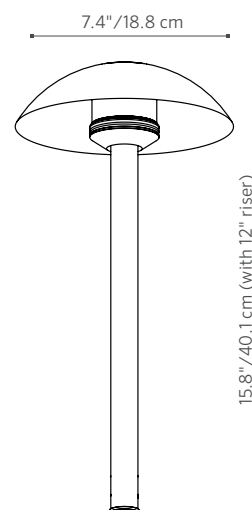

\*(Use this number to size the transformer)



# CV: Path Light

**FACTORY INSTALLED OPTIONS (TOP + RISER ASSEMBLY):** Order 1 + 2 + 3 + 4 (Optional) + 5 + 6 + 7

Step	Description	Code
1	TOP ASSEMBLY	CVLEDTA
2	TOP FINISH	AB*, AT*, CU, NP*, WG, FW, AL, BZ, DG, WI, SB, FB
3	RISER TYPE	G
4	LUXOR OPTION	ZD, ZDC <sup>†</sup> (Color)
5	LAMP	1LED, 3LED, _____ <sup>†</sup>
6	RISER HEIGHT	8RA, 12RA, 18RA, 24RA, 36RA (in inches)
7	FINISH	AB*, AT*, CU, NP*, WG, FW, AL, BZ, DG, WI, SB, FB

**EXAMPLE: Top Assembly-Top Finish + Riser Type-Luxor Option-Lamp-Riser Height-Riser Finish**  
**CVLEDTA-FB + G-ZD-1LED-18RA-FB**


<sup>†</sup> Fixtures specified with ZDC Technology™ are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.

**FIELD INSTALLED OPTIONS:** Order Individually

Mounting Options	
Long Slot Spike (250015840000) 2.5" x 10" <b>Included</b> ▶	
SuperJ-Box (SJ-XX**) 2.5" x 12"	
Post Mount (PM-XX**) 2.5" x 13"	
Versa Box (VB-050-XX**) 2.2" x 1.5"	
3-Prong Spike (250020020000) 5.1" Diam. x 9.0" tall	
	<p><b>Long Slot Spike</b>      <b>Super J-Box XX**</b>      <b>Post Mount XX**</b></p>

**EXAMPLE: 753900 = Super Slot Spike**

**PHOTOMETRICS:**

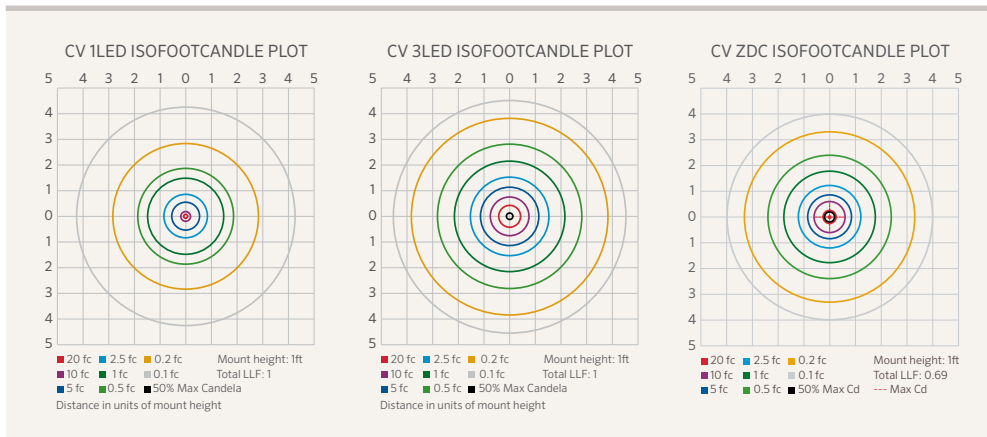

Beam angle is calculated using LM-79 method for SSL Luminaires:  
 "Beam angle is defined as two times the vertical angle at which the intensity is 50% of the maximum."


**METALS**

- AB** = Antique Bronze\* (On Brass/Copper)
- AT** = Antique Tumbled\* (On Brass/Copper)
- CU** = Copper
- NP** = Nickel Plate\*

**POWDER COAT**

- WG** = White Gloss
- FW** = Flat White
- AL** = Almond
- BZ** = Bronze Metallic
- DG** = Desert Granite
- WI** = Weathered Iron
- SB** = Sedona Brown
- FB** = Flat Black

The CV and G-riser include choice of LED board, riser size, finish, 3 ft. lead wire and Long Slot Spike.



**Note:** Only the copper portions of the path lights are powder coated. The brass pieces remain natural, except Antiqued and Nickel-plated finishes.

\* May require longer lead time  
 \*\* Denotes finish code