FXLuminaire.


Path and Area Lights



The JS is a solid path light built to last in the harshest environments and provide efficient illumination. Available in both 1 and 3 LED with the ability to emit soft light that's functional and beautiful, the JS is an excellent path light for many applications.

JS: Path Light

NUMBER OF LEDS:	1	3	ZDC
HALOGEN LUMEN EQUIVALENT:	10 Watt	20 Watt	10 Watt
USEFUL LED LIFE (L70):	50,000 hrs avg	50,000 hrs avg	50,000 hrs avg
INPUT VOLTAGE:	10 to 15V	10 to 15V	11 to 15V
VA TOTAL*:	2.4	4.5	7.2
WATTS USED:	2.0	4.2	6.0
LUMENS PER WATT (EFFICACY):	19	25	20
TOTAL LUMENS:	39	103	66
CRI (Ra):	86	67	85
CCT:			
AMBER FILTER	2700K	2700K	N/A
FROSTED FILTER	3900K	3900K	N/A
GREEN FILTER	4500K	4500K	N/A
BLUE FILTER	5200K	5200K	N/A




*(Use this number to size the transformer)

INTEGRATED LED

ORDERING INFORMATION

JS: Path Light

FACT	ORY INSTALLED O	OPTIONS (TOP + RISER A	SSEMBLY): O	rder 1 + 2 + 3	+ 4 (Optional) + 5 + 6 + 7	METALS
Step	Description	Code				AT = Antique Tumbled* (On Brass/Copper)
1	TOP ASSEMBLY	JSLEDTA				
2	TOP FINISH	AB*, AT*, CU, NP*, WG, F\	N, AL, BZ, DG, V	VI, SB, FB		AB = Antique Bronze* (On Brass/Copper)
3	RISER TYPE	G				
4	LUXOR OPTION	ZD, ZDC [†] (Color)				CU = Copper
5	LAMP	1LED, 3LED,†	<pre>POWDER COAT</pre>			
6	RISER HEIGHT	8RA, 12RA, 18RA, 24RA, 3				
7	FINISH	AT*, AB*, CU, NP*, WG, F\	AT*, AB*, CU, NP*, WG, FW, AL, BZ, DG, WI, SB, FB			
JSLED † Fixtu	TA-FB + G-ZD-1LEI res specified with ZD(y-Top Finish + Riser Type-L D-18RA-FB C Technology™ are available or f LEDs when ordering.				WG = White Gloss FW = Flat White
		TIONS: Order Individu	ally			
	ting Options					AL = Almond
Long Slot Spike (250015840000) 2.5" x 10" Included >				BZ = Bronze Metallic		
SuperJ	-Box (SJ-XX**) 2.5" >	< 12"		Y		DG = Desert Granite
Post M	lount (PM-XX**) 2.5'	" x 13"	₩	₩		WI = Weathered Iron
Versa B	Box (VB-050-XX**) 2	2.2" x 1.5"	-			
3-Pron	g Spike (250020020	0000) 5.1" Diam. x 9.0" tall	Long Slot Spike	Super J-Box XX**	Post Mount XX**	SB = Sedona Brown
EXAMPLE: 753900 = Super Slot Spike					FB = Flat Black	
рнот	OMETRICS:					
JS 1LED ISOFOOTCANDLE PLOT JS 3LED ISOFOOTCANDLE PLOT JS ZDC ISOFOOTCANDLE PLOT 5 4 3 2 1 0 1 2 3 4 5 5 4 3 2 1 0 1 2 3 4 5 5 4 3 2 1 0 1 2 3 4 5					The JS and G-riser include choice of LED board, riser size and finisl 3 ft. lead wire and Long Slot Spik	
5	4 3 2 1 0 1 2		0 1 2 3 4	5 5 4 3	2 1 0 1 2 3 4 5	All JS path lights com

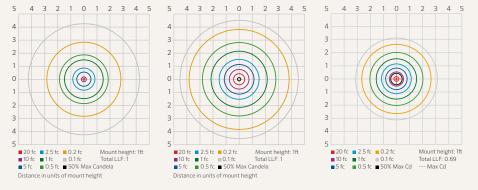

Beam angle is calculated using LM-79 method for SSL Luminaires: "Beam angle is defined as two times the vertical angle at which the intensity is 50% of the maximum." LISTED

3YJ8

00

standard with amber,

green, blue and

frosted filters

Note: Only the copper portions of the

brass pieces remain natural, except on

path lights are powder coated. The

Antiqued or Nickel-plated finishes.

% of the maximum."